


Flange	Holes	PCD	Bolt Size	A	B	Material
DN20 PN16	4	75	M12	105	18	316SS
DN25 PN16	4	85	M12	115	18	316SS
DN40 PN16	4	110	M16	150	18	316SS
DN50 PN16	4	125	M16	165	18	316SS
1" ANSI 150lb	4	79	1/2"	108	18	316SS
2" ANSI 150lb	4	120.7	5/8"	152	18	316SS

Note:
 Flange Thickness (B) Must be Minimum 18mm to Provide Protection for Sensor Diaphragm
 All Flanges Supplied Loose for Customer to Fit. Refer to Instruction Drawing P19051-APT-GA
 Other Flange Sizes are Available. Refer to PSM

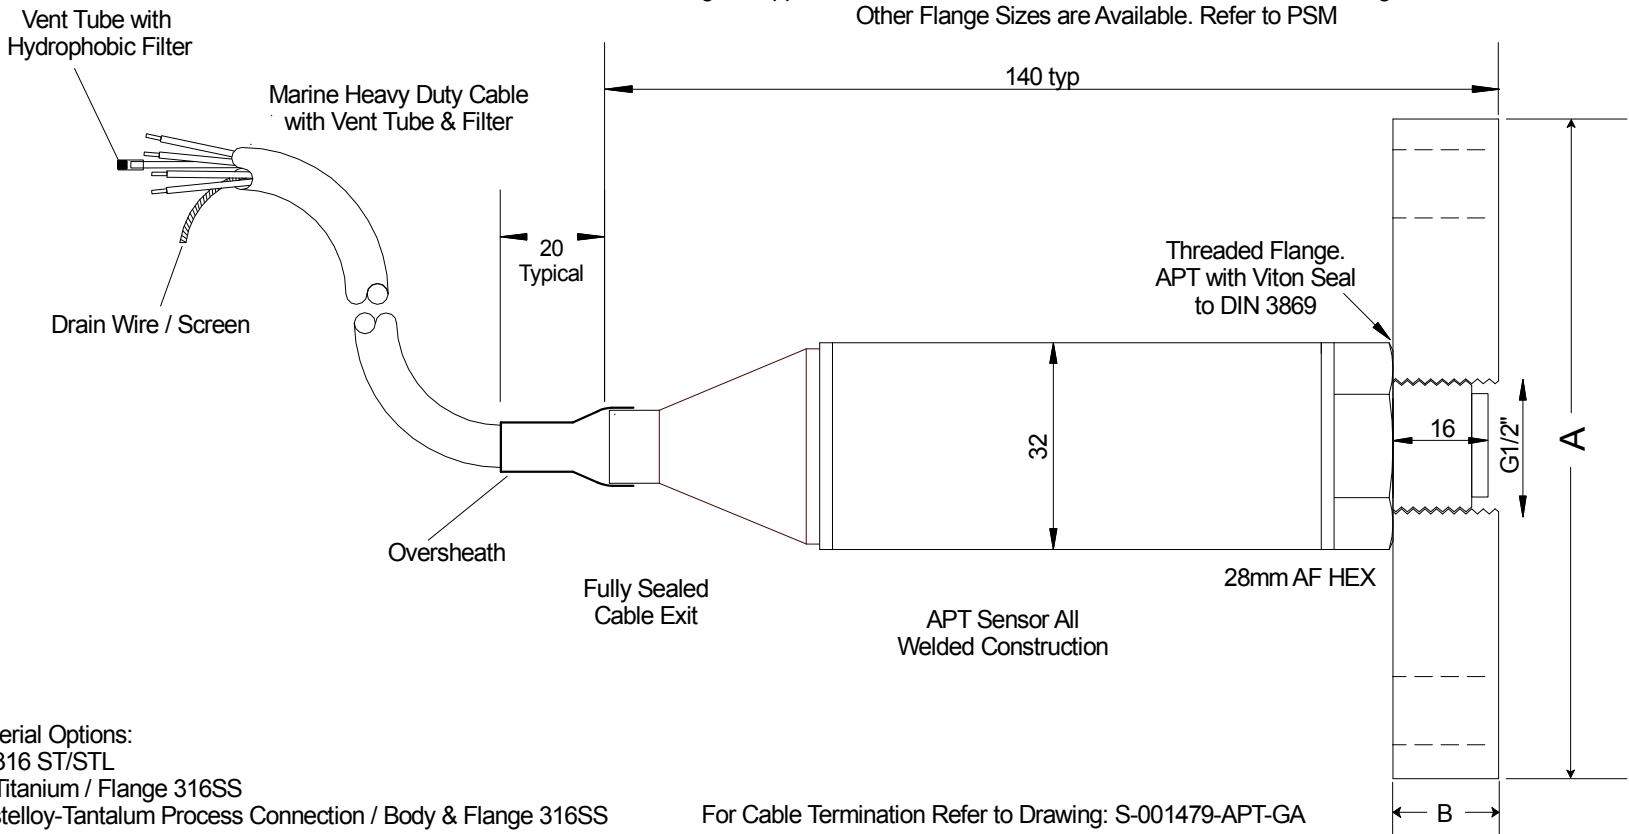

Material Options:
 All 316 ST/STL
 All Titanium / Flange 316SS
 Hastelloy-Tantalum Process Connection / Body & Flange 316SS

For Cable Termination Refer to Drawing: S-001479-APT-GA

SCALE	NTS	FINISH
MATERIAL AND SPECIFICATION		
ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE STATED TOLERANCES UNLESS OTHERWISE STATED	±0.1	ANG #2
ISSUE	DATE	CHECKED
	18-11-19	
	TR	
	DRAWN	
	SAL	
		MU



INSTRUMENTATION LTD
 PART OF THE **scanjet** GROUP

TITLE
APT Flange Transmitter
 Datasheets
 APT500 DAT054 / APT1000 DAT57

DRAWING No
S-001474-APT-DD
SALES DRAWING ONLY

SHT 1
 OF 1
A4